


OPEN TYPE MOTOR

6W


□60mm

LEAD WIRE TYPE

DIMENSIONS

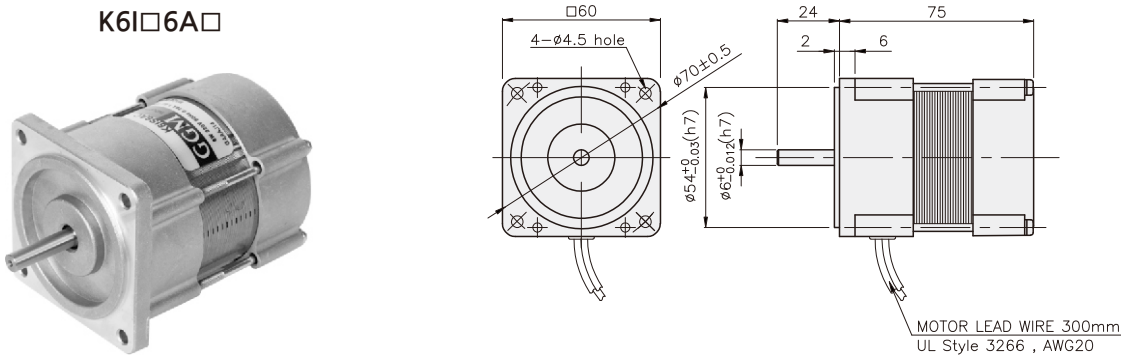

CONNECTION DIAGRAMS

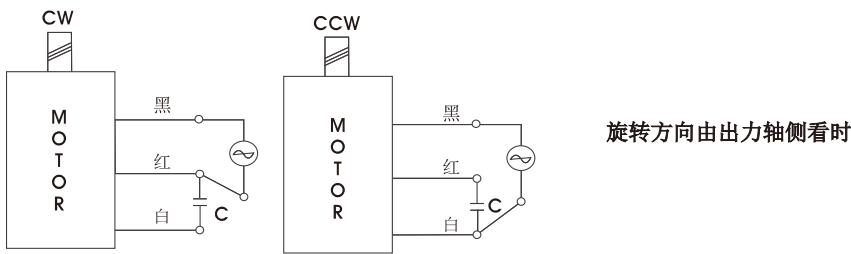

SPECIFICATIONS

6W 连续正格，4极

Model		Voltage (V)	Frequency (Hz)	Current (A)	Start T. (N·m/kgf·cm)	Rated T. (N·m/kgf·cm)	Speed (rpm)	Condenser (μF)
K6I□6A□	单项	100	50	0.25	0.04/0.4	0.049/0.49	1200	3
			60	0.23		0.04/0.4	1500	
		110	60	0.18	0.035/0.35	0.04/0.4	1500	2
				0.19	0.04/0.4			
		200	50	0.11	0.045/0.45	0.049/0.49	1200	0.8
			60			0.04/0.4	1500	
		220	50	0.11	0.04/0.4	0.047/0.47	1250	0.6
			60	0.1	0.035/0.35	0.04/0.4	1500	
		230	50	0.12	0.045/0.45	0.047/0.47	1250	
			60	0.11	0.04/0.4	0.04/0.4	1500	
		240	50	0.12	0.045/0.45	0.047/0.47	1250	0.5

* 电机式样与感应电机一样。适用于减速机K6G□B(C)系列。
* 适用减速机及减速比例输出扭矩值时，请参考感应电机的扭矩及减速机。
* □：电机轴形状 (S：STRAIGHT, G：PINION)